




LG Optimus F3 Headphone Jack Replacement

Guide on how to replace the headphone jack. This guide is super easy, only need to unscrew screw and you can simply remove the audio jack connector

Written By: Ryan McDermott

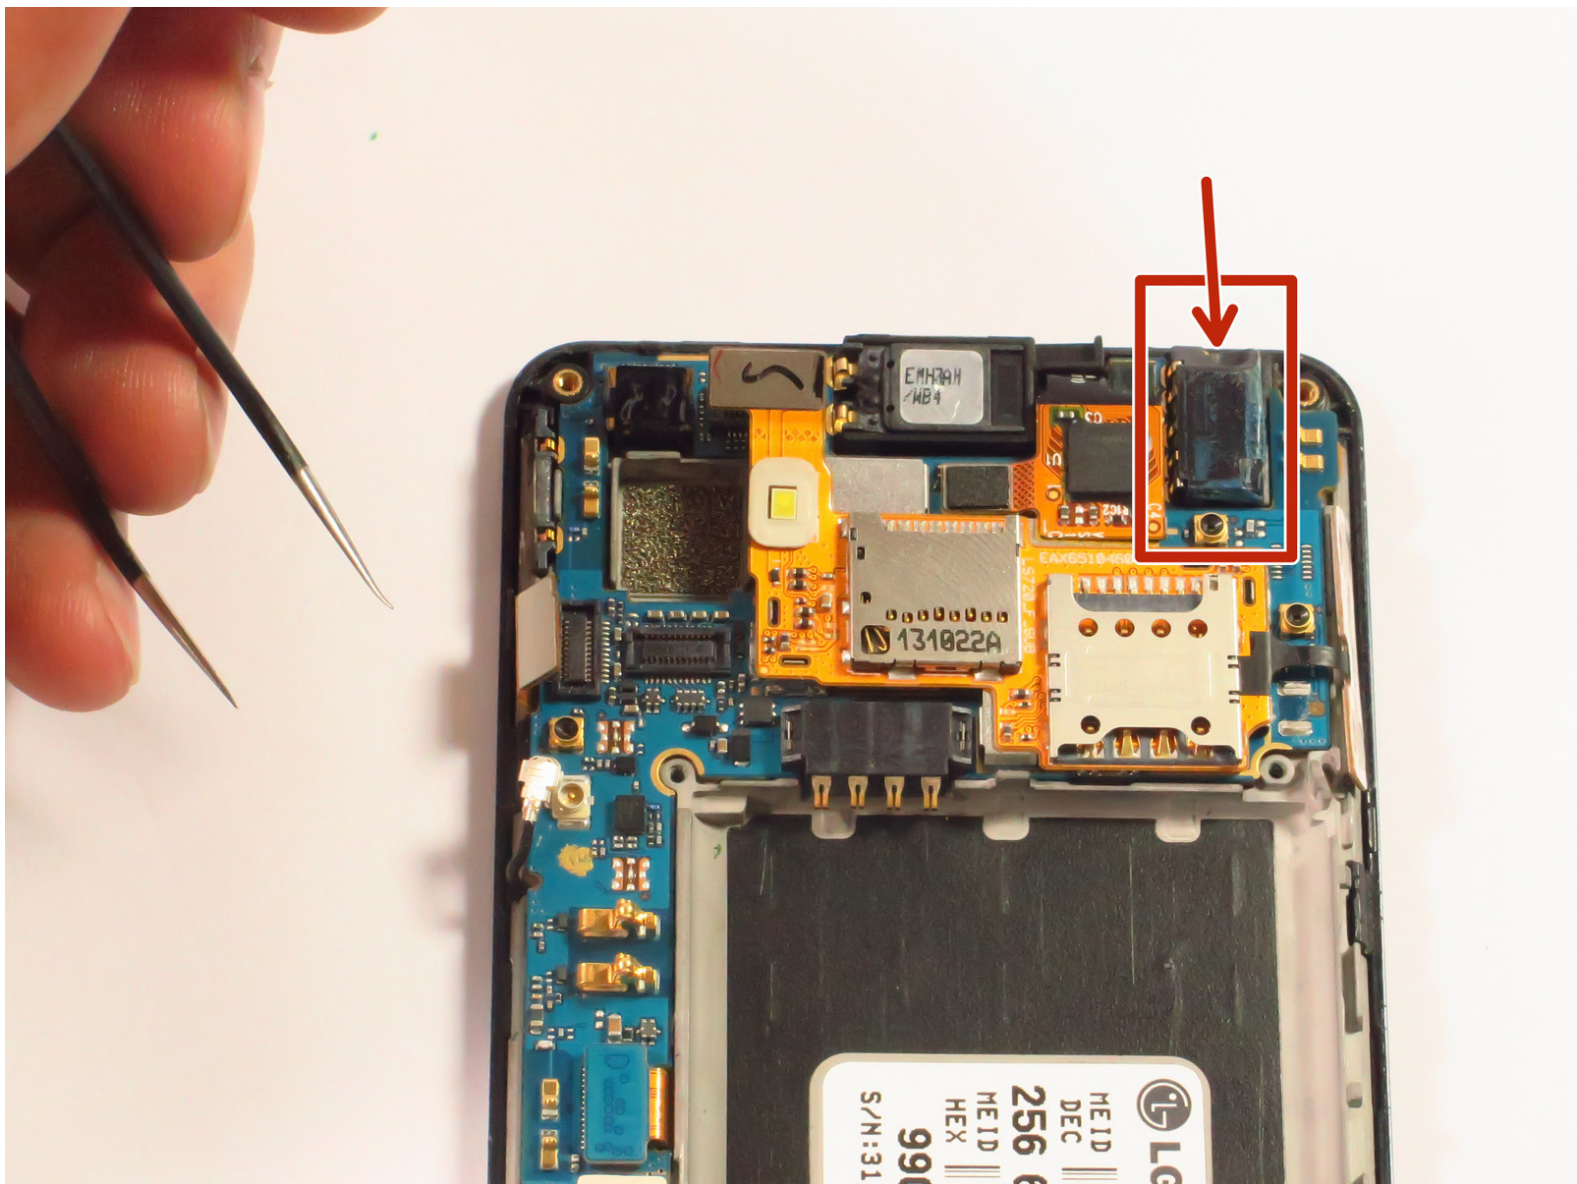



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
 - [64 Bit Driver Kit](#) (1)
-

Step 1 — Headphone Jack



- Remove the Battery cover and Battery.

Step 2

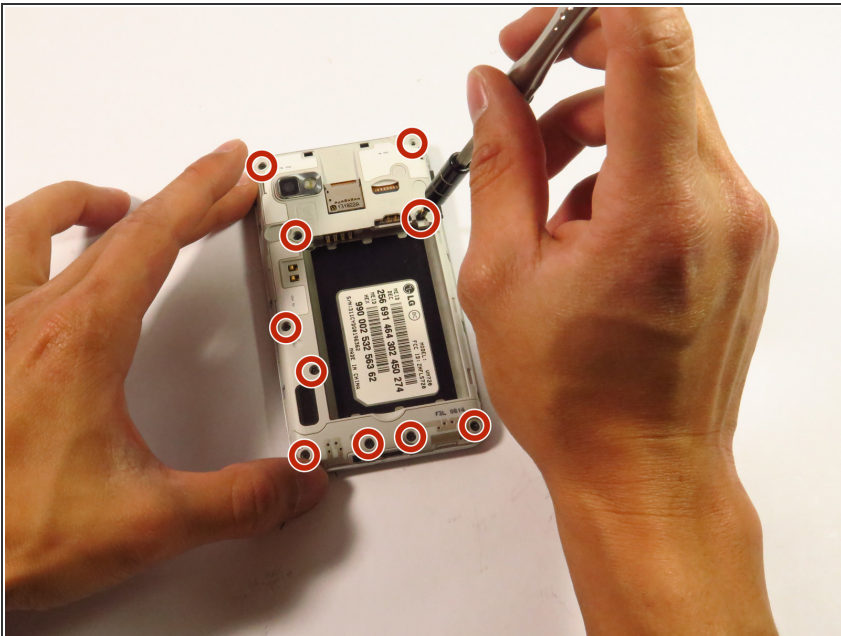

- Remove the 10 screws on the rear case.

Step 3




- Use a plastic opening tool to remove the rear case.

Step 4




- Locate your headphone jack.

Step 5

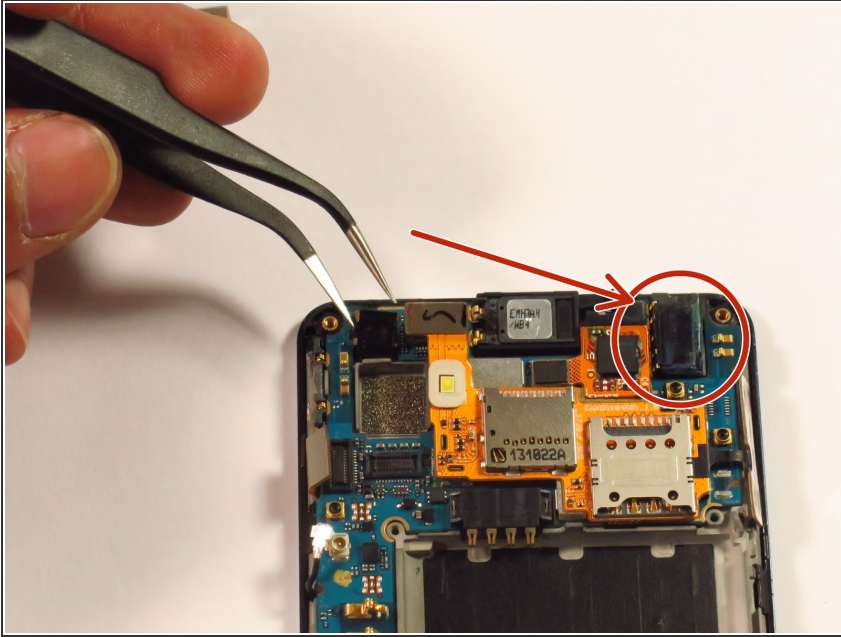

- Use tweezers to remove the headphone jack.

Step 6

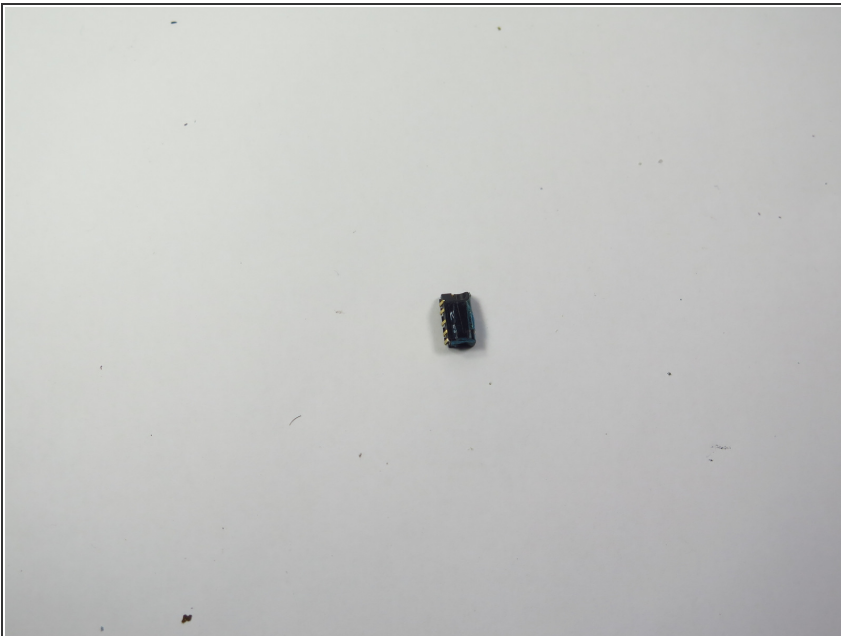

- Headphone jack removed.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 04:39:32 PM.